




Kołnierz płaski do przyspawania typ 01 (wg normy PN-EN 1092-1) – PN 25 - 40

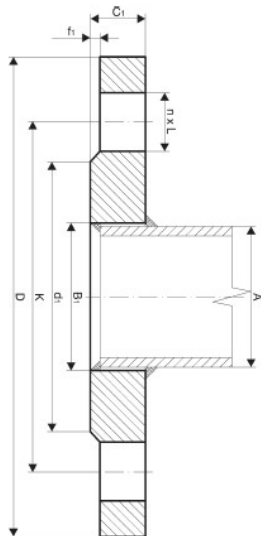

DN	Ciężnienie nominalne PN [bar]	RURA		KOŁNIERZ						ŚRUBA		MASA [kg]
		A [mm]	B ₁ [mm]	D [mm]	K [mm]	d ₁ [mm]	f ₁ [mm]	C ₁ [mm]	L [mm]	n	Wielkość	
Dla kołnierzy DN 10 do DN 150 obowiązują wymiary jak dla ciśnienia PN 40												
200	25	219,1	221,5	360	310	278	2	32	26	12	M24	13,74
250	25	273,0	276,5	425	370	335	2	35	30	12	M27	19,43
300	25	323,9	327,5	485	430	395	2	38	30	16	M27	25,80
350	25	355,6	359,5	555	490	450	2	42	33	16	M30	40,68
400	25	406,4	411	620	550	505	2	46	36	16	M33	53,86
450	25	457,0	462	670	600	555	2	50	36	20	M33	63,14
500	25	508,0	513,5	730	660	615	2	56	36	20	M33	82,37
600	25	610,0	616,5	845	770	720	2	68	39	20	M36	125,15

www.dalstal.pl

DALSTAL Grzegorz Dalidonis
 Cekanowo ul. Mazowiecka 2B, 09 – 472 Słupno, woj. mazowieckie, POLSKA
 tel. (024) 366-19-81, 601-245-915, e-mail: dalstal@dalstal.pl





Kołnierz płaski do przyspawania typ 01 (wg normy PN-EN 1092-1) – PN 25 - 40

DN	Ciśnienie nominalne PN [bar]	RURA		KOŁNIERZ						ŚRUBA		MASA [kg]
		A [mm]	B ₁ [mm]	D [mm]	K [mm]	d ₁ [mm]	f ₁ [mm]	C ₁ [mm]	L [mm]	n	Wielkość	
10	40	13,5*	14	90	60	40	2	14	14	4	M12	0,54
		17,2	18									0,53
15	40	20,0*	20,5	95	65	45	2	14	14	4	M12	0,6
		21,3	22,0									0,59
20	40	25,0*	26	105	75	58	2	16	14	4	M12	0,86
		26,9	27,5									0,85
25	40	30,0*	32	115	85	68	2	16	14	4	M12	1,03
		33,7	34,5									1,01
32	40	38,0*	39	140	100	78	2	18	18	4	M16	1,71
		42,4	43,5									1,67
40	40	44,5*	45,5	150	110	88	2	18	18	4	M16	1,96
		48,3	49,5									1,91
50	40	57,0*	58	165	125	102	2	20	18	4	M16	2,59
		60,3	61,5									2,54
65	40	76,1	77,5	185	145	122	2	22	18	8	M16	3,27
80	40	88,9	90,5	200	160	138	2	24	18	8	M16	4,09
100	40	108,0*	109	235	190	162	2	26	22	8	M20	6,01
		114,3	116									5,76
125	40	133,0*	135	270	220	188	2	28	26	8	M24	8,10
		139,7	141,5									7,79
150	40	159,0*	161	300	250	218	2	30	26	8	M24	10,39
		168,3	170,5									9,81
200	40	219,1	221,5	375	320	285	2	36	30	12	M27	17,32
250	40	273,0	276,5	450	385	345	2	42	33	12	M30	28,37
300	40	323,9	327,5	515	450	410	2	48	33	16	M30	40,59
350	40	355,6	359,5	580	510	485	2	54	36	16	M33	60,81
400	40	406,4	411	660	585	535	2	60	39	16	M36	88,06
450	40	457,0	462	685	610	560	2	66	39	20	M36	90,11
500	40	508,0	513,5	755	670	615	2	72	42	20	M39	118,34
600	40	610,0	616,5	890	795	735	2	84	48	20	M45	186,89

*średnice mogą być wykonane na specjalne zamówienie

www.dalstal.pl

DALSTAL Grzegorz Dalidonis

Cekanowo ul. Mazowiecka 2B, 09 – 472 Stupno, woj. mazowieckie, POLSKA
tel. (024) 366-19-81, 601-245-915, e-mail: dalstal@dalstal.pl

