




Kołnierz płaski do przyspawania typ 01 (wg normy PN-EN 1092-1) – PN 2,5 - 6

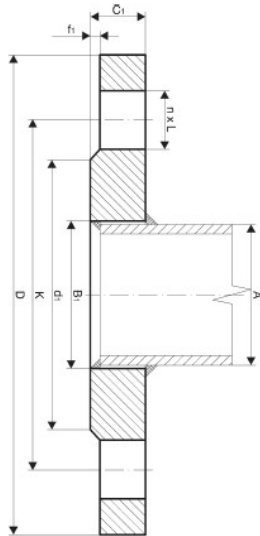

DN	Ciężnienie nominalne PN [bar]	RURA	KOŁNIERZ							ŚRUBA		MASA [kg]
		A [mm]	B ₁ [mm]	D [mm]	K [mm]	d ₁ [mm]	f ₁ [mm]	C ₁ [mm]	L [mm]	n	Wielkość	
Dla kołnierzy DN 10 do DN 1000 obowiązują wymiary jak dla ciśnienia PN 6												
1200	2,5	1219,0	Po uzgodnieniu	1375	1320	1280	2	Po uzgodnieniu	30	32	M27	-
1400	2,5	1422,0		1575	1520	1480	2		30	36	M27	-
1600	2,5	1626,0		1790	1730	1690	2		30	40	M27	-
1800	2,5	1829,0		1990	1930	1890	2		30	44	M27	-
2000	2,5	2032,0		2190	2130	2090	2		30	48	M27	-
10	6	13,5*	14	75	50	35	2	12	11	4	M10	0,32
		17,2	18									0,31
15	6	20,0*	20,5	80	55	40	2	12	11	4	M10	0,35
		21,3	22									0,35
20	6	25,0*	26	90	65	50	2	14	11	4	M10	0,54
		26,9	27,5									0,53
25	6	30,0*	32	100	75	60	2	16	11	4	M10	0,66
		33,7	34,5									0,65
32	6	38,0*	39	120	90	70	2	16	14	4	M12	1,09
		42,4	43,5									1,05
40	6	44,5*	45,5	130	100	80	2	16	14	4	M12	1,27
		48,3	49,5									1,23

* średnice mogą być wykonane na specjalne zamówienie

www.dalstal.pl

DALSTAL Grzegorz Dalidonis

Cekanowo ul. Mazowiecka 2B, 09 – 472 Słupno, woj. mazowieckie, POLSKA

tel. (024) 366-19-81, 601-245-915, e-mail: dalstal@dalstal.pl





Kołnierz płaski do przyspawania typ 01 (wg normy PN-EN 1092-1) – PN 2,5 - 6

DN	Ciężnienie nominalne PN [bar]	RURA	KOŁNIERZ							ŚRUBA		MASA [kg]
		A [mm]	B ₁ [mm]	D [mm]	K [mm]	d ₁ [mm]	f ₁ [mm]	C ₁ [mm]	L [mm]	n	Wielkość	
50	6	57,0*	58	140	110	90	2	16	14	4	M12	1,39
		60,3	61,5									1,35
65	6	76,1	77,5	160	130	110	2	16	14	4	M12	1,70
80	6	88,9	90,5	190	150	128	2	18	18	4	M16	2,72
100	6	108,0*	109	210	170	148	2	18	18	4	M16	3,17
		114,3	116									3,00
125	6	133,0*	135	240	200	178	2	20	18	8	M16	4,25
		139,7	141,5									4,02
150	6	159,0*	161	265	225	202	2	20	18	8	M16	4,81
		168,3	170,5									4,42
200	6	219,1	221,5	320	280	258	2	22	18	8	M16	6,47
250	6	273,0	276,5	375	335	312	2	24	18	12	M16	8,43
300	6	323,9	327,5	440	395	365	2	24	22	12	M20	11,24
350	6	355,6	359,5	490	445	415	2	26	22	12	M20	16,07
400	6	406,4	411	540	495	465	2	28	22	16	M20	19,00
450	6	457,0	462	595	550	520	2	30	22	16	M20	23,62
500	6	508,0	513,5	645	600	570	2	30	22	20	M20	25,37
600	6	610,0	616,5	755	705	670	2	32	26	20	M24	33,48
700	6	711,0	Po uzgodnieniu	860	810	775	2	Po uzgodnieniu	26	24	M24	-
800	6	813,0		975	920	880	2		30	24	M27	-
900	6	914,0		1075	1020	980	2		30	24	M27	-
1000	6	1016,0		1175	1120	1080	2		30	28	M27	-
1200	6	1219,0		1405	1340	1295	2		33	32	M30	-
1400	6	1422,0		1630	1560	1510	2		36	36	M33	-
1600	6	1626,0		1830	1760	1710	2		36	40	M33	-
1800	6	1829,0		2045	1970	1920	2		39	44	M36	-
2000	6	2032,0		2265	2180	2125	2		42	48	M39	-

*średnice mogą być wykonane na specjalne zamówienie

www.dalstal.pl

DALSTAL Grzegorz Dalidonis

Cekanowo ul. Mazowiecka 2B, 09 – 472 Słupno, woj. mazowieckie, POLSKA
tel. (024) 366-19-81, 601-245-915, e-mail: dalstal@dalstal.pl

