




## Kołnierz szyjkowy do przyspawania typ 11 (wg normy PN-EN 1092-1) – PN 6

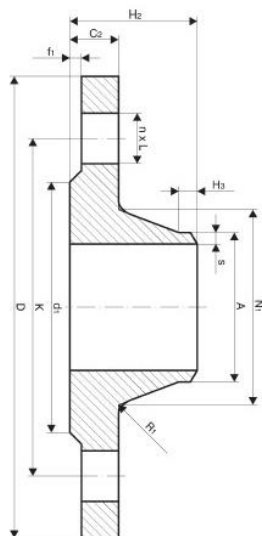

DN	Ciężnienie nominalne PN [bar]	RURA A [mm]	KOŁNIERZ											ŚRUBA		MASA [kg]
			D [mm]	K [mm]	L [mm]	H <sub>2</sub> [mm]	C <sub>2</sub> [mm]	N <sub>1</sub> [mm]	H <sub>3</sub> [mm]	R <sub>1</sub> [mm]	S [mm]	d <sub>1</sub> [mm]	f <sub>1</sub> [mm]	n	Wielkość	
10	6	13,5*	75	50	11	28	12	22	6	4	1,8	35	2	4	M10	0,34
		17,2						26								0,34
15	6	20,0*	80	55	11	30	12	28	6	4	2	40	2	4	M10	0,39
		21,3						30								0,39
20	6	25,0*	90	65	11	32	14	35	6	4	2,3	50	2	4	M10	0,59
		26,9						38								0,60
25	6	30,0*	100	75	11	35	14	40	6	4	2,6	60	2	4	M10	0,69
		33,7						42								0,67
32	6	38,0*	120	90	14	35	14	50	6	6	2,6	70	2	4	M12	1,06
		42,4						55								0,94
40	6	44,5*	130	100	14	38	14	58	7	6	2,6	80	2	4	M12	1,20
		48,3						62								1,18
50	6	57,0*	140	110	14	38	14	70	8	6	2,9	90	2	4	M12	1,35
		60,3						74								1,34
65	6	76,1	160	130	14	38	14	88	9	6	2,9	110	2	4	M12	1,68
80	6	88,9	190	150	18	42	16	102	10	8	3,2	128	2	4	M16	2,71
100	6	108,0*	210	170	18	45	16	122	10	8	3,6	148	2	4	M16	3,30
		114,3						130								3,21
125	6	133,0*	240	200	18	48	18	148	10	8	4	178	2	8	M16	4,49
		139,7						155								4,50
150	6	159,0*	265	225	18	48	18	172	12	10	4,5	202	2	8	M16	5,18
		168,3						184								5,50

\* średnice mogą być wykonane na specjalne zamówienie

[www.dalstal.pl](http://www.dalstal.pl)

DALSTAL Grzegorz Dalidonis

Cekanowo ul. Mazowiecka 2B, 09 – 472 Słupno, woj. mazowieckie, POLSKA  
tel. (024) 366-19-81, 601-245-915, e-mail: dalstal@dalstal.pl





## Kołnierz szyjkowy do przyspawania typ 11 (wg normy PN-EN 1092-1) – PN 6

DN	Ciężnienie nominalne PN [bar]	KOŁNIERZ												ŚRUBA		MASA [kg]
		RURA A [mm]	D [mm]	K [mm]	L [mm]	H <sub>2</sub> [mm]	C <sub>2</sub> [mm]	N <sub>1</sub> [mm]	H <sub>3</sub> [mm]	R <sub>1</sub> [mm]	s [mm]	d <sub>1</sub> [mm]	f <sub>1</sub> [mm]	n	Wielkość	
200	6	219,1	320	280	18	55	20	238	15	10	6,3	258	2	8	M16	8,31
250	6	273,0	375	335	18	60	22	290	15	12	6,3	312	2	12	M16	11,50
300	6	323,9	440	395	22	62	22	342	15	12	7,1	365	2	12	M20	15,00
350	6	355,6	490	445	22	62	22	385	154	12	7,1	415	2	12	M20	19,50
400	6	406,4	540	495	22	65	22	438	15	12	7,1	465	2	16	M20	22,00
450	6	457,0	595	550	22	65	22	492	15	12	7,1	520	2	16	M20	25,00
500	6	508,0	645	600	22	68	24	538	15	12	7,1	570	2	20	M20	29,50
600	6	610,0	755	705	26	70	30	640	16	12	7,1	670	2	20	M24	43,00
700	6	711,0	860	810	28	70	24	740	16	12	7,1	775	2	24	M24	43,50
800	6	813,0	975	920	30	70	24	842	16	12	7,1	880	2	24	M27	52,00
900	6	914,0	1075	1020	30	70	26	942	16	12	7,1	980	2	24	M27	61,50
1000	6	1016,0	1175	1120	30	70	26	1045	16	16	7,1	1080	2	28	M27	67,00
1200	6	1219,0	1405	1340	33	90	28	1248	20	16	8	1295	2	32	M30	105,50
1400	6	1422,0	1630	1560	36	90	32	1452	20	16	8	1510	2	36	M33	149,00
1600	6	1626,0	1830	1760	36	90	34	1655	20	16	9	1710	2	40	M33	181,50
1800	6	1829,0	2045	1970	39	100	36	1855	20	16	10	1920	2	44	M36	235,00
2000	6	2032,0	2265	2180	42	110	38	2058	25	16	11	2125	2	48	M39	302,00

\*średnice mogą być wykonane na specjalne zamówienie

[www.dalstal.pl](http://www.dalstal.pl)

DALSTAL Grzegorz Dalidonis

Cekanowo ul. Mazowiecka 2B, 09 – 472 Słupno, woj. mazowieckie, POLSKA  
tel. (024) 366-19-81, 601-245-915, e-mail: dalstal@dalstal.pl

