




Kołnierz płaski do przyspawania typ 01 (wg normy PN-EN 1092-1) – PN 63 - 100

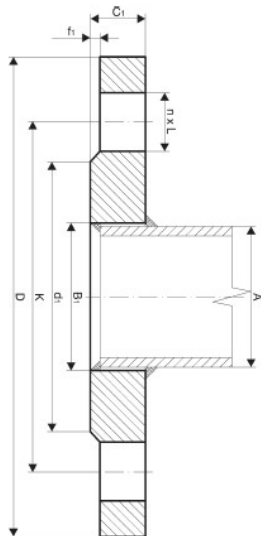

DN	Ciężnienie nominalne PN [bar]	RURA		KOŁNIERZ						ŚRUBA		MASA [kg]
		A [mm]	B ₁ [mm]	D [mm]	K [mm]	d ₁ [mm]	f ₁ [mm]	C ₁ [mm]	L [mm]	n	Wielkość	
Dla kołnierzy DN 10 do DN 40 obowiązują wymiary jak dla ciśnienia PN 100												
50	63	57,0*	58	180	135	102	2	26	22	4	M20	4,09
		60,3	61,5									4,03
65	63	76,1	77,5	205	160	122	2	26	22	8	M20	4,86
80	63	88,9	90,5	215	170	138	2	30	22	8	M20	6,03
100	63	108,0*	109	250	200	162	2	32	26	8	M24	8,54
		114,3	116									8,22
125	63	133,0*	135	295	240	188	2	34	30	8	M27	12,36
		139,7	141,5									11,98
150	63	159,0*	161	345	280	218	2	36	33	8	M30	17,95
		168,3	170,5									17,25
200	63	219,1	221,5	415	345	285	2	46	36	12	M33	29,57
250	63	273,0	276,5	470	400	345	2	54	36	12	M33	41,83
300	63	323,9	327,5	530	460	410	2	62	36	16	M33	57,29
350	63	355,6	359,5	600	525	465	2	72	39	16	M36	90,11
400	63	406,4	411	670	585	535	2	78	42	16	M39	119,35

*średnice mogą być wykonane na specjalne zamówienie

www.dalstal.pl

DALSTAL Grzegorz Dalidonis

Cekanowo ul. Mazowiecka 2B, 09 – 472 Słupno, woj. mazowieckie, POLSKA

tel. (024) 366-19-81, 601-245-915, e-mail: dalstal@dalstal.pl





Kołnierz płaski do przyspawania typ 01 (wg normy PN-EN 1092-1) – PN 63 - 100

DN	Ciśnienie nominalne PN [bar]	RURA		KOŁNIERZ						ŚRUBA		MASA [kg]
		A [mm]	B ₁ [mm]	D [mm]	K [mm]	d ₁ [mm]	f ₁ [mm]	C ₁ [mm]	L [mm]	n	Wielkość	
10	100	13,5*	14	100	70	40	2	20	14	4	M12	1,02
		17,2	18									1,00
15	100	20,0*	20,5	105	75	45	2	20	14	4	M12	1,11
		21,3	22,0									1,10
20	100	25,0*	26	130	90	58	2	22	18	4	M16	1,87
		26,9	27,5									1,86
25	100	30,0*	32	140	100	68	2	24	18	4	M16	2,39
		33,7	34,5									2,36
32	100	38,0*	39	155	110	78	2	24	22	4	M20	2,84
		42,4	43,5									2,79
40	100	44,5*	45,5	170	125	88	2	26	22	4	M20	3,75
		48,3	49,5									3,69
50	100	57,0*	58	195	145	102	2	28	26	4	M24	5,21
		60,3	61,5									5,13
65	100	76,1	77,5	220	170	122	2	30	26	8	M24	6,49
80	100	88,9	90,5	230	180	138	2	34	26	8	M24	7,88
100	100	108,0*	109	265	210	162	2	36	30	8	M27	10,89
		114,3	116									10,54
125	100	133,0*	135	315	250	188	2	42	33	8	M30	18,03
		139,7	141,5									17,56
150	100	159,0*	161	355	290	218	2	48	33	12	M30	24,94
		168,3	170,5									24,01
200	100	219,1	221,5	430	360	285	2	60	36	12	M33	43,39
250	100	273,0	276,3	505	430	345	2	72	39	12	M36	69,73
300	100	323,9	327,5	585	500	410	2	84	42	16	M39	105,22
350	100	355,6	359	655	560	465	2	95	48	16	M45	151,96
400	100	406,4	411	715	620	535	2	108	48	16	M45	197,19
500	100	508,0	513,5	870	760	615	2	128	56	20	M52	335,67

*średnice mogą być wykonane na specjalne zamówienie

www.dalstal.pl

DALSTAL Grzegorz Dalidonis

Cekanowo ul. Mazowiecka 2B, 09 – 472 Stupno, woj. mazowieckie, POLSKA

tel. (024) 366-19-81, 601-245-915, e-mail: dalstal@dalstal.pl

